

INDEXING SPINNER HANGER

SERIE SH



(SH2560 shown)

ISTblast airless blast, spinner hangers come in a variety of sizes. Rugged, long lasting, industrial equipment that provides versatility in blasting a wide range of part sizes and shapes.

The Spinner Hanger delivers high efficiency with center-fed blast wheels. A cast control cage in the wheel allows for management of the abrasive pattern achieving the highest percentage of shot impact on the work.

ISTblast equipment is designed for ease of maintenance and durability. ISTblast blast wheels proven reliability and longevity blend well with the heavy-duty construction of the Spinner Hanger.

Markets

- General manufacturing
- Industrial Equipment
- Metal forming
- Aerospace and aviation
- Rail and Transit
- Marine
- Automotive
- Power & Energy

Features

- 3 Cast lined blast chambers
- Manganese wheel housing and cast liners
- Heavy duty abrasive recycling system
- Twice the horsepower than comparable equipment
- Light curtains standard to provide the highest level of operator safety
- Rugged construction with 25% more weight than comparable equipment
- Multiple Indexing Available
- Low and easy maintenance
- Heavy duty auger system
- Machine warranty
- Pre-wired and tested

No other indexing spinner hanger blast system on the market today offers the many practical benefits like an ISTblast trough blaster as standard equipment. Just look at the features. The standard components in a ISTblast system have been carefully designed for safety, ease of operation, reduced maintenance and increased productivity.

Some options


- Dust collection system
- Rotary scalp drum
- Auxillary abrasive hopper and low level sensor



SH1545



SH2560 : rear view

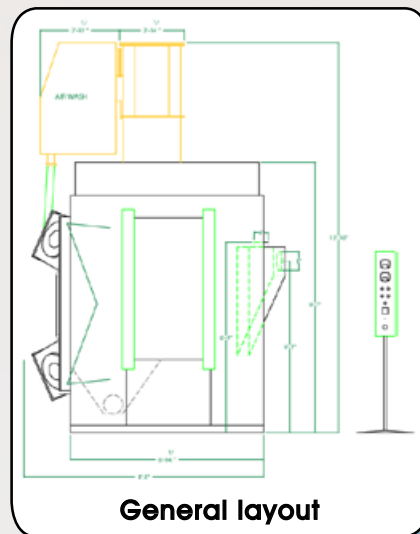

General layout

It is in the customization of our basic designs to your parts specific needs that truly sets ISTblast apart from the competition. With an accomplished and proven design staff, ISTblast can build equipment from the ground up or simply modify existing models to tailor fit your cleaning application. At ISTblast we do not simply match your part to the closest machine size that will work. We match our blast equipment to your part, to provide the most efficient and economical cleaning solution possible.

| SPECIFICATIONS | SH 1545 | SH 2560 | SH 3460 |
|-----------------------------------|---------------------|----------------------|-----------------------|
| Work Envelope | 15" Dia. x 45" H | 25" Dia. x 60" H | 34" Dia. x 60" H |
| Overall Dimensions | 74"L x 64"W x 150"H | 120"L x 96"W x 187"H | 130"L x 102"W x 187"H |
| Number of Blast Chambers | 2 | 3 | 2 |
| Electrical | 460V, 3-PH 60 HZ | 460V, 3-PH 60 HZ | 460V, 3-PH 60 HZ |
| Abrasive Required | 1 200 lbs. | 1 600 lbs. | 1 600 lbs. |
| Lip Type Airwash Separator | 20" | 20" | 20" |
| Blast Wheels : | | | |
| • Number of Wheels | 2 | 2 | 2 |
| • Horsepower | 5 or 7.5 hp | 15 hp | 15 hp |
| • Diameter | 9.5" ø | 15" ø | 15" ø |
| • R.P.M | 3 600 | 3 600 | 3 600 |
| Floor Space Required | 84" L x 72" W | 126" L x 102" W | 140" L x 102" W |
| Shipping Weight | 6 100 lbs. | 8 800 lbs. | 10 500 lbs. |



International
Surface
Technologies

4160 Industriel Blvd.
Laval, Quebec
H7L 6H1 Canada

Toll free 1 877 629-8202
T 450 963-2200
F 450 963-5122
Info@istblast.com
www.istblast.com